



6MR400-4 BULLET

Professional Mid Range Driver



KEY FEATURES

- 200 Watts continuous power handling
- 95 dB Sensitivity
- 145 - 12,500 Hz of frequency response

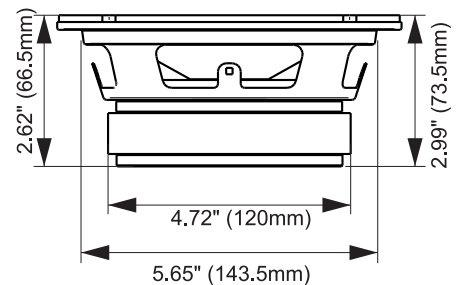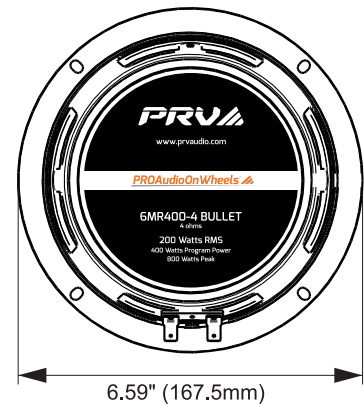

GENERAL SPECIFICATIONS

Nominal Diameter	6" (152 mm)
Nominal impedance	4 Ohms
Rated Power Handling	200 Watts
Program Power	400 Watts
Sensitivity 2.00 V at 1m	95 dB
Recommended Hi Pass Crossover*	145 Hz*
<small>*For Full Power Handling</small>	<small>*12db Per Octave Crossover</small>
Frequency Response at -10dB	145 - 12,500 Hz
Voice Coil Diameter	1.5" (38 mm)
Voice Coil Wire	CCAW
Voice Coil Winding Depth	9.5 mm
Former Material	Kapton
Magnetic Gap Depth	6.0 mm
Frame Material	Stamped Steel


THIELE-SMALL PARAMETERS

Equivalent Volume	Vas	4.40 l
Excursion	Xmax	3.25 mm
Free Air Resonance	Fs	144.1 Hz
Mechanical Factor	Qms	11.98
Electrical Factor	Qes	0.64
Total Factor	Qts	0.60
Cone Area	Sd	143 cm ²
Mechanical Mass	Mms	7.94 g
Bl Factor	BL	6.37 Tm
Dc Resistance	Re	3.6 Ohms
Inductance	Le	0.136mH at 1 kHz
Mechanical Mass Without Air	Mmd	6.97 g
Mechanical Compliance	Cms	0.154 mm/N

EXTRA INFO

Overall Diameter	6.59" (167.5 mm)
Front Mount Baffle Cutout	5.65" (143.5 mm)
Mounting Depth	2.62" (66.5 mm)
Overall Depth	2.99" (73.5 mm)
Net Weight	4.81 Lbs (2.18 kg)
Shipping Weight	5.18 Lbs (2.35 kg)
Carton Dimensions W x L x H	8.50" x 8.50" x 3.35" (175 x 175 x 85 mm)

Frequency Response Measured at 2.00 V/1m

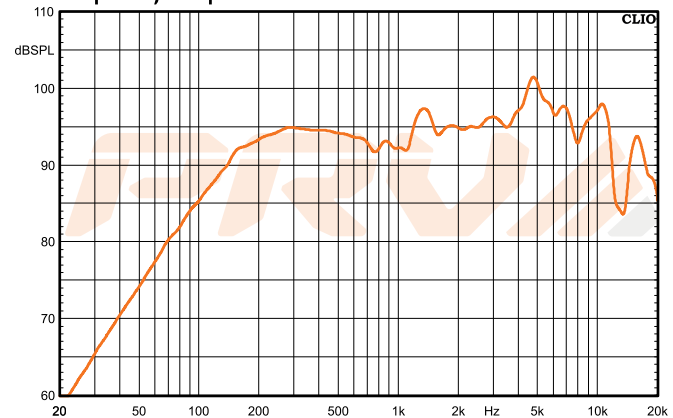

PRV AUDIO USA (USA and Export) PRV AUDIO BRAZIL (Brazilian Sales Only)
 POMPANO BEACH, FL SAO LEOPOLDO, RS
 support@prvaudio.com vendas@pvaudio.com.br
 www.prvaudio.com www.pvaudio.com.br

**Xmax=(Voice coil winding depth-Magnetic Gap depth)/2+ Magnetic Gap Depth/4

*** T-S parameters measured after 2 hours at 1/2 Rated power, pink noise preconditioning test