

6MR500-NDY

Professional Midrange Driver




KEY FEATURES

- Special pole piece design for best High Freq. performance and low distortion
- Suitable for line array applications, space efficient octagonal basket
- Lightweight design combined with a high efficient neodymium slug assembly
- Sturdy cast aluminum basket to minimize acoustic distortion



GENERAL SPECIFICATIONS

Nominal Diameter	6" (152 mm)
Nominal impedance	8 Ohm
Nominal Power Handling	250 Watts
Continuous Program Power (RMS)	500 Watts
Max Peak Power	1000 Watts
Sensitivity 2.83V at 1m	96 dB
Recommended Hi Pass Crossover*	220 Hz*
<small>*For Full Power Handling</small>	<small>*12db Per Octave Crossover</small>
Frequency Response at -10dB	90 - 13,000 Hz
Voice Coil Diameter	2" (50 mm)
Voice Coil Wire	CCAW
Voice Coil Winding Depth	11.2 mm
Former Material	Kapton
Magnetic Gap Depth	5.5 mm
Frame Material	Die Cast Aluminum

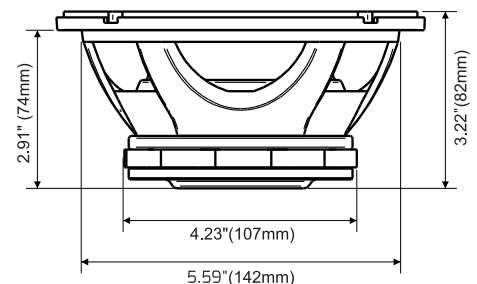


THIELE-SMALL PARAMETERS

Equivalent Volume	Vas	5.13 l
Excursion (mathematical)***	Xmax	4.22 mm
Free Air Resonance	Fs	104.6 Hz
Mechanical Factor	Qms	22.73
Electrical Factor	Qes	0.54
Total Factor	Qts	0.53
Cone Area	Sd	143 cm ²
Mechanical Mass	Mms	12.88 g
Bl Factor	BL	9.84 Tm
Dc Resistance	Re	6.2 Ohms
Inductance	Le	0.12 mH at 1 kHz
Mechanical Mass Without Air	Mmd	11.91 g
Mechanical Compliance	Cms	0.179 mm/N

EXTRA INFO

Overall Diameter	6.47" (164.5 mm)
Front Mount Baffle Cutout	5.59" (142 mm)
Mounting Depth	2.91" (74 mm)
Overall Depth	3.22" (82 mm)
Net Weight	3.34 Lbs (1.51 kg)
Shipping Weight	3.64 Lbs (1.65 kg)
Carton Dimensions W x L x H	7.09" x 7.09" x 4.37" (155 x 155 x 95mm)

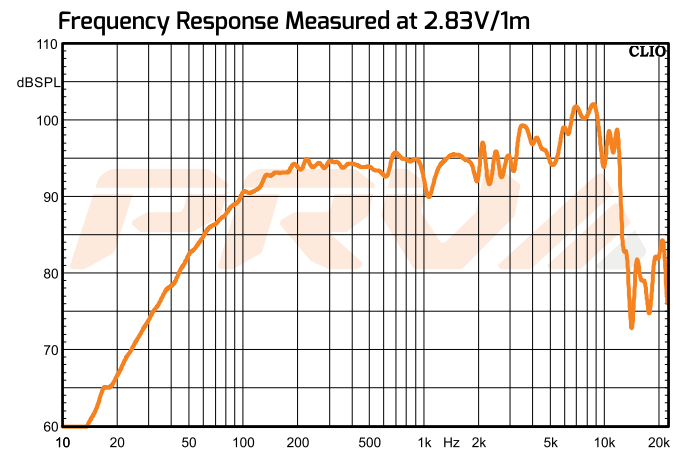

***Xmax=(Voice coil winding depth-Magnetic Gap depth)/2+ Magnetic Gap Depth/4

PRVA AUDIO USA (USA and Export)
FORT LAUDERDALE, FL
support@prvaudio.com
www.prvaudio.com