

D250Ti-B

Professional Compression Driver





KEY FEATURES

- 1.4" Voice coil and 1" exit
- 100Watts continuous program power
- 106 dB Sensitivity
- High-grade Titanium diaphragm




Exit Throat Diameter	1" (25.4 mm)
Nominal Impedance	8 Ohm
Nominal Power Handling	50 Watts
Continuous Program Power (RMS)	100 Watts
Peak Power	200 Watts
Sensitivity 2.83V at 1m*	106 dB
Recommended High Pass Crossover**	2000 Hz***
for Full Power Handling *12 db/oct Crossover	
Frequency Response at -10dB	1,800-20,000Hz
Voice Coil Diameter	1.4" (35.5 mm)
Voice Coil Wire	CCAW
Voice Coil Former Material	Kapton®
Diaphragm Material	Titanium
Flux Density	1.65 T
Magnet Material	Ferrite

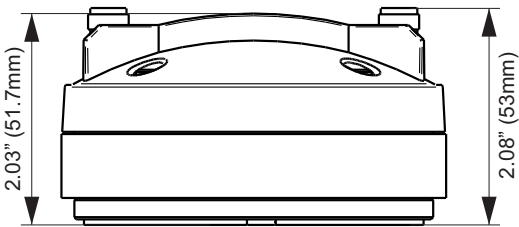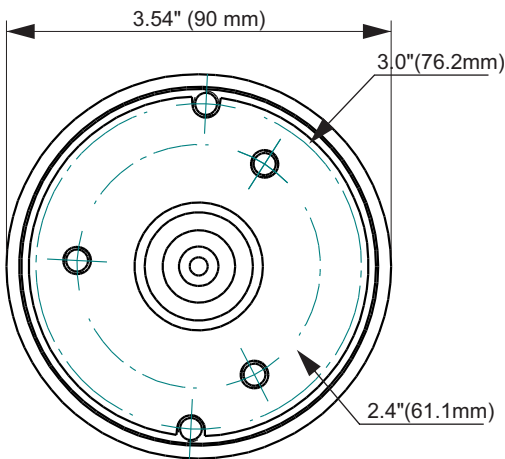


Overall Diameter	3.54" (90 mm)
Overall Depth	2.08" (53 mm)
Mounting Bolt Circle	M6 x 2 3" (76.2 mm)
	M6 x 3 2.4" (61.1 mm)
Net Weight	1.90 lbs (0.86 kg)
Shipping Weight	2.20 lbs (1 kg)
Carton Dimensions W x L x H	3.74" x 3.74" x 3.66" (95 x 95 x 93 mm)

Impedance Curve - Free Air

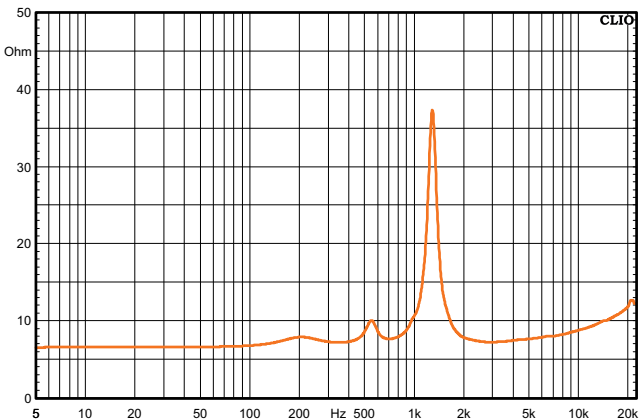

Frequency Response Measured at 2.83V/1m

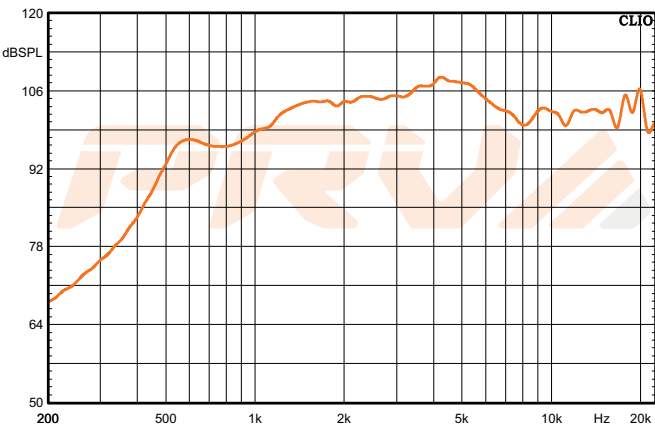

*Frequency Response and Impedance curve Measured on WGP14-25S

PRV AUDIO USA (USA and Export)
POMPAÑO BEACH, FL
support@prvaudio.com
www.prvaudio.com