

D280Ti-B

Professional Compression Driver





KEY FEATURES

- 1.75" Voice coil and 1" exit
- 160 Watts continuous program power
- 109 dB Sensitivity
- High-grade Titanium diaphragm



GENERAL SPECIFICATIONS


Exit Throat Diameter	1" (25.4 mm)
Nominal Impedance	8 Ohm
Nominal Power Handling	80 Watts
Continuous Program Power (RMS)	160 Watts
Peak Power	320 Watts
Sensitivity 2.83V at 1m*	109 dB
Recommended High Pass Crossover**	1800 Hz***
for Full Power Handling *12 db/oct Crossover	
Frequency Response at -10dB	1,300-20,000Hz
Voice Coil Diameter	1.75" (44.4 mm)
Voice Coil Wire	CCAW
Voice Coil Former Material	Kapton®
Diaphragm Material	Titanium
Flux Density	1.65 T
Magnet Material	Ferrite

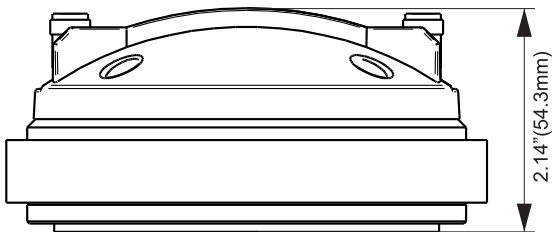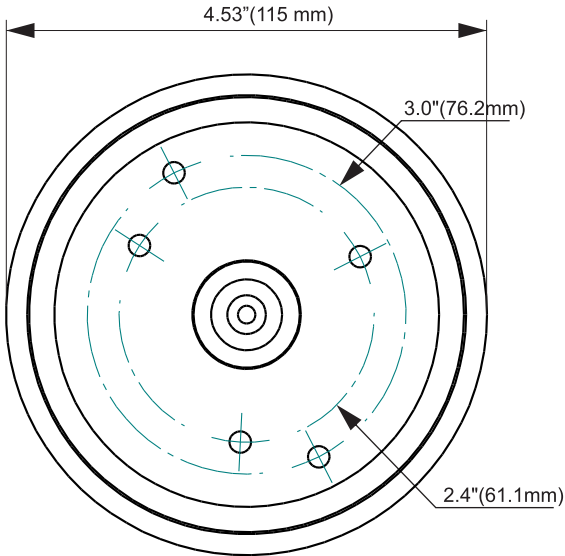


EXTRA INFO

Overall Diameter	4.53" (115 mm)
Overall Depth	2.14" (54.3 mm)
Mounting Bolt Circle	M6 x 2 3" (76.2 mm)
	M6 x 3 2.4" (61.1 mm)
Net Weight	3.19 lbs (1.45 kg)
Shipping Weight	3.52 lbs (1.60 kg)
Carton Dimensions W x L x H	5.31" x 4.96" x 3.36" (135 x 126 x 88 mm)

Impedance Curve - Free Air

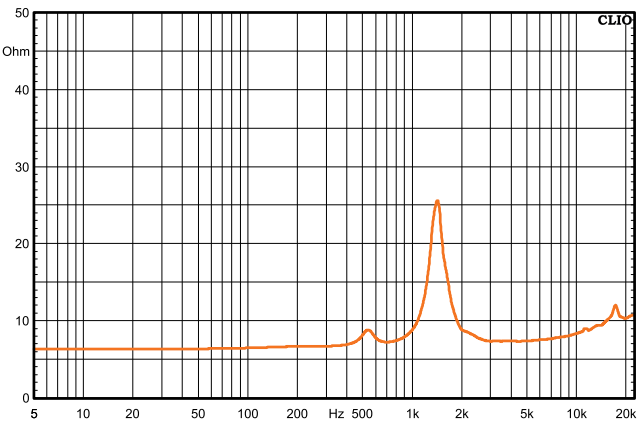

Frequency Response Measured at 2.83V/1m

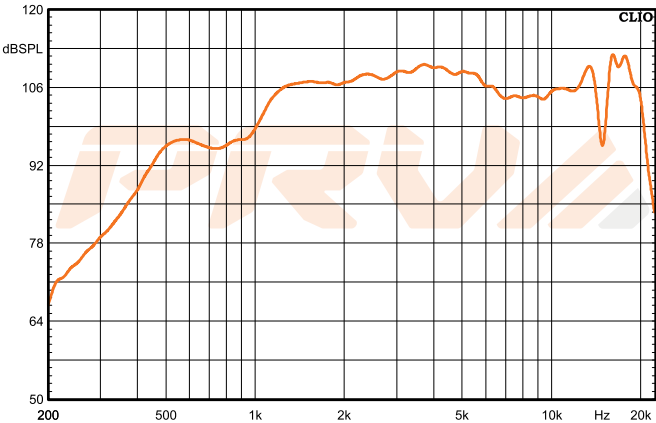

*Frequency Response and Impedance curve Measured on WGP14-255