

D290Py-S

Professional Compression Driver





KEY FEATURES

- 1.75" Voice coil and 1" exit
- 180 Watts continuous program power
- 109 dB Sensitivity
- Polyimide diaphragm




Exit Throat Diameter	1" (25.4 mm)
Nominal Impedance	8 Ohm
Nominal Power Handling	90 Watts
Continuous Program Power (RMS)	180 Watts
Peak Power	360 Watts
Sensitivity 2.83V at 1m*	109 dB
Recommended High Pass Crossover**	1000 Hz***
for Full Power Handling *12 db/oct Crossover	
Frequency Response at -10dB	650 - 19,000Hz
Voice Coil Diameter	1.75" (44.4 mm)
Voice Coil Wire	CCAW
Voice Coil Former Material	Kapton®
Diaphragm Material	Polyimide
Flux Density	1.88 T
Magnet Material	Ferrite

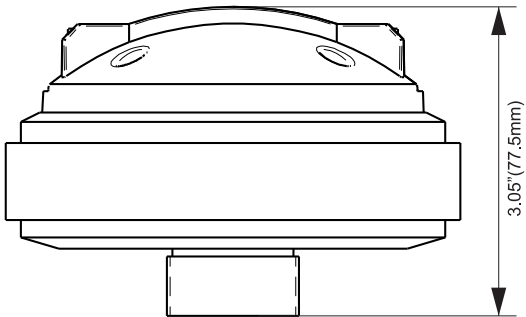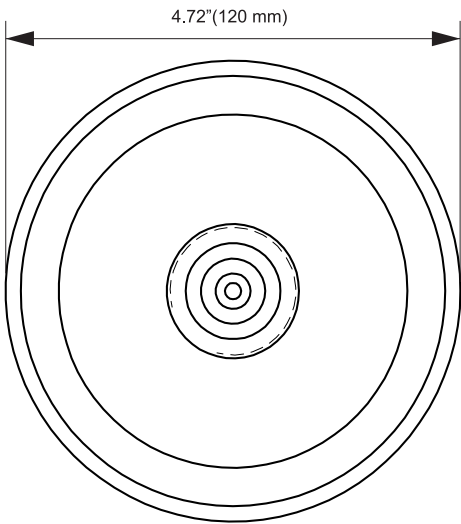


Overall Diameter	4.72" (120 mm)
Overall Depth	3.05" (77.7 mm)
Mounting Thread	1 3/8" 18TPI
Net Weight	4.74 lbs (2.15 kg)
Shipping Weight	4.85 lbs (2.20 kg)
Carton Dimensions W x L x H	5.51" x 5.11" x 3.74" (140 x 130 x 95 mm)

Impedance Curve - Free Air

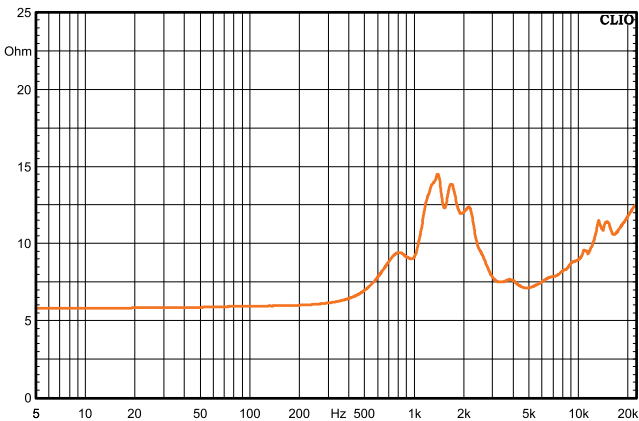

Frequency Response Measured at 2.83V/1m

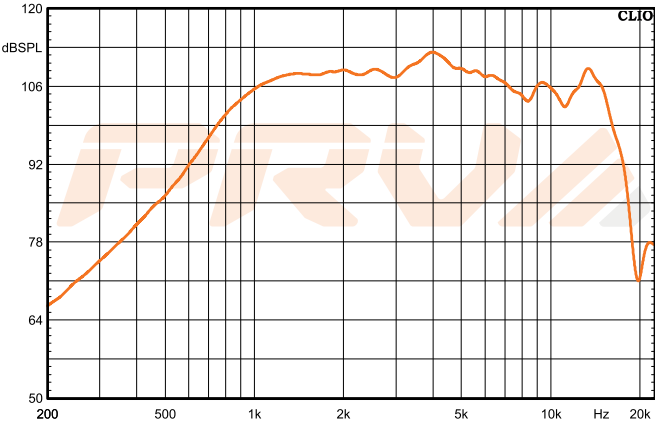

*Frequency Response and Impedance curve Measured on WGP14-255

PRV AUDIO USA (USA and Export)
Fort Lauderdale, FL
support@prvaudio.com
www.prvaudio.com