



D4600TiH-Nd

Professional Compression Driver



KEY FEATURES

- 4" Voice coil and 2" exit
- 600 Watts continuos program power
- 111 dB Sensitivity
- Hybrid Titanium-Mylar diaphragm

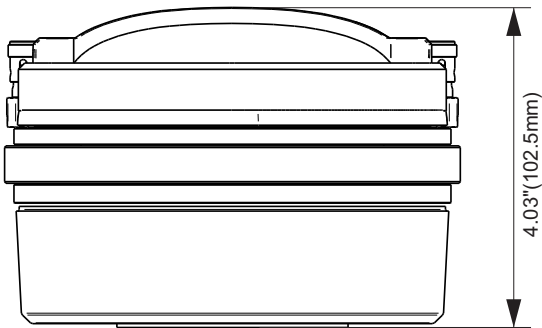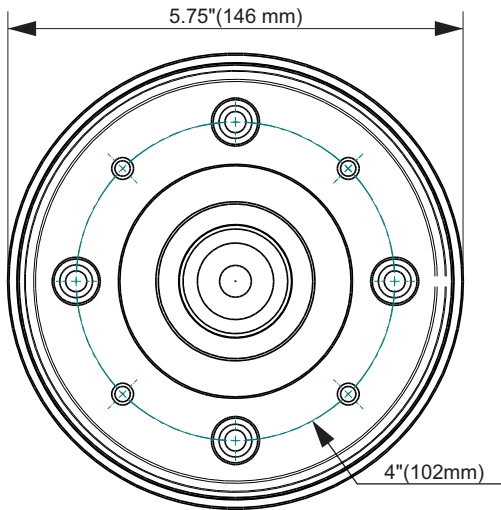


GENERAL SPECIFICATIONS

| | |
|--|---------------------------------------|
| Exit Throat Diameter | 2" (50 mm) |
| Nominal Impedance | 8 Ohm |
| Nominal Power Handling | 300 Watts |
| Continuous Program Power (RMS) | 600 Watts |
| Peak Power | 1200 Watts |
| Sensitivity 2.83V at 1m* | 111 dB |
| Recommended High Pass Crossover** | 650 Hz*** |
| <small>**for Full Power Handling</small> | <small>***12 db/oct Crossover</small> |
| Frequency Response at -10dB | 450 - 19,000Hz |
| Voice Coil Diameter | 4" (101 mm) |
| Voice Coil Wire | CCAW |
| Voice Coil Former Material | Kapton® |
| Diaphragm Material | Titanium-Mylar |
| Flux Density | 2.5 T |
| Magnet Material | Neodymium |


EXTRA INFO

| | |
|-----------------------------|--|
| Overall Diameter | 5.75" (146 mm) |
| Overall Depth | 4.03" (102.5 mm) |
| Mounting Bolt Circle | M6 x 4 4" (102 mm) |
| Net Weight | 8.60 lbs (4.90 kg) |
| Shipping Weight | 9.35 lbs (4.25 kg) |
| Carton Dimensions W x L x H | 6.8" x 6.3" x 5.13" (165 x 165 x 145 mm) |

Impedance Curve - Free Air

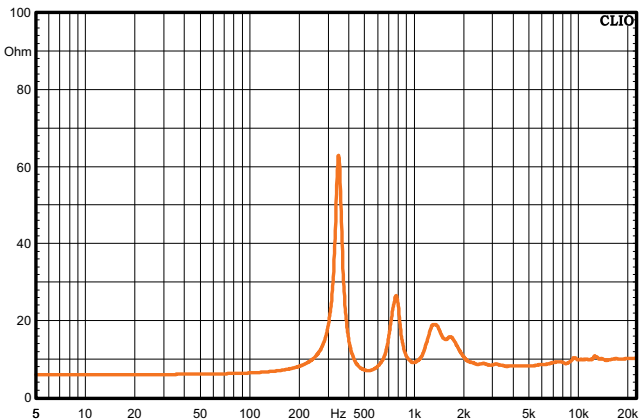

Frequency Response Measured at 2.83V/1m

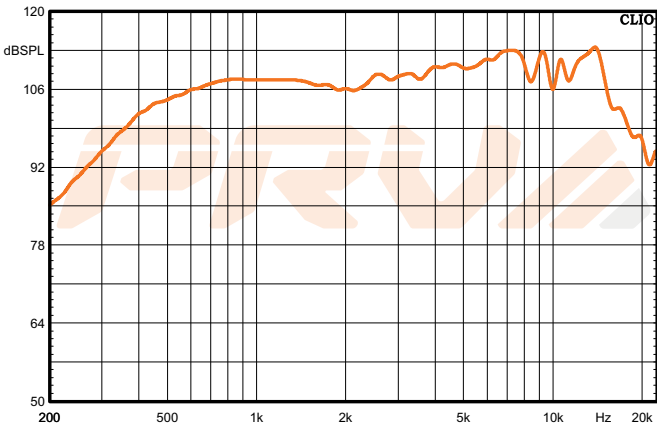

PRV AUDIO USA (USA and Export)
POMPANO BEACH, FL
support@prvaudio.com
www.prvaudio.com