


TW500Ti-4

Professional Super Tweeter



KEY FEATURES

- 1.0" Voice coil
- 120 Watts Continuous Program Power
- 104 dB Sensitivity
- Titanium Diaphragm

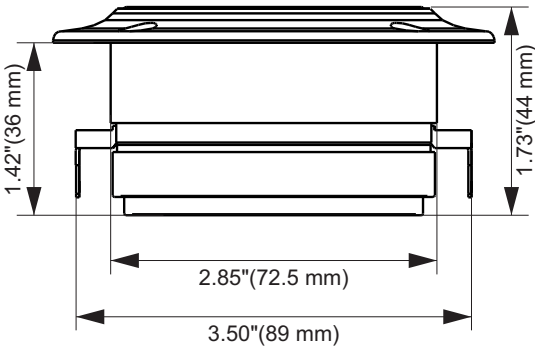


GENERAL SPECIFICATIONS

Nominal Impedance	4 Ohm
Nominal Power Handling	60 Watts
Continuous Program Power(RMS)	120 Watts
Max Peak Power	240 Watts
Sensitivity 2.00V at 1m*	104 dB
Recommended High Pass Crossover**	6000 Hz***
for Full Power Handling *12db/oct Crossover	
Frequency Response at -10dB	4,500-20,000Hz
Voice Coil Diameter	1.0" (25 mm)
Voice Coil Wire	CCAW
Voice Coil Former Material	Kapton®
Diaphragm Material	Titanium
Flux Density	1.24 T
Magnet Material	Ferrite


EXTRA INFO

Overall depth	1.73" (44 mm)
Mounting Depth	1.42" (36 mm)
Overall Diameter	3.80" (96.5 mm)
Cutout Diameter + Terminals	2.85" (72.5 mm)
Net Weight	1.0 lb (0.45 kg)
Shipping Weight (pair)	2.53 lb (1.15 kg)
Carton Dimensions W x L x H	8.86" x 5.53" x 2.16" (225 x 115 x 55 mm)

Impedance Curve - Free Air

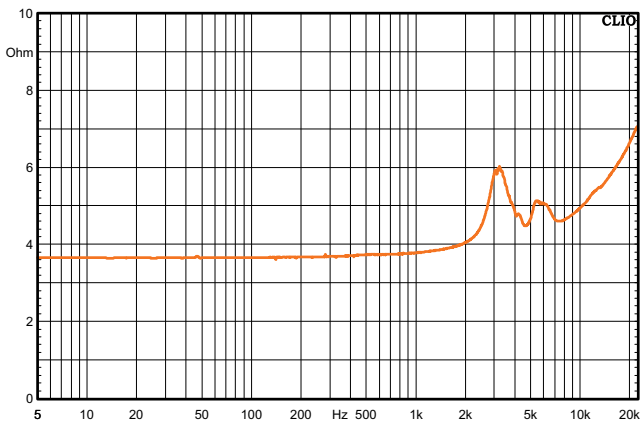

Frequency Response Measured at 2.00V/1m

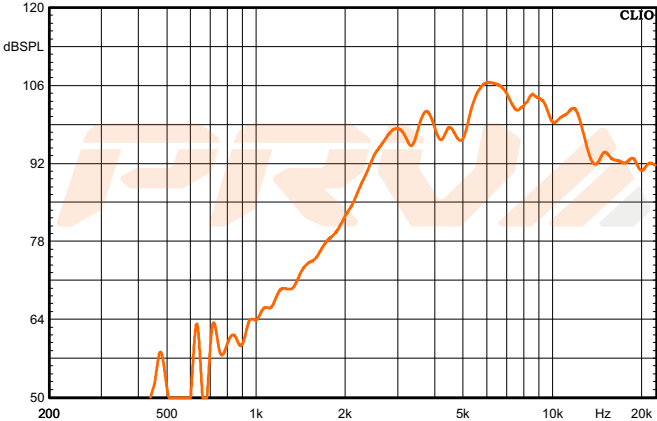

PRV AUDIO USA (USA and Export)
Fort Lauderdale, FL
support@prvaudio.com
www.prvaudio.com