

WG270Ph

Professional Compression Driver





KEY FEATURES

- 2" Copper wire voice coil and 1" exit
- 150 Watts continuous program power
- 106.5 dB Sensitivity
- WGP11-25 Plastic waveguide



GENERAL SPECIFICATIONS


Exit Throat Diameter	1" (25.4 mm)
Nominal Impedance	8 Ohm
Nominal Power Handling	75 Watts
Continuous Program Power (RMS)	150 Watts
Peak Power	300 Watts
Sensitivity 2.83V at 1m*	106.5 dB
Recommended High Pass Crossover**	500 Hz***
**for Full Power Handling	
***12 db/oct Crossover	
Frequency Response at -10dB	600 - 8,000Hz
Voice Coil Diameter	2"(50 mm)
Voice Coil Wire	Copper
Voice Coil Former Material	Kapton
Diaphragm Material	Phenolic
Flux Density	1.10 T
Magnet Material	Ferrite

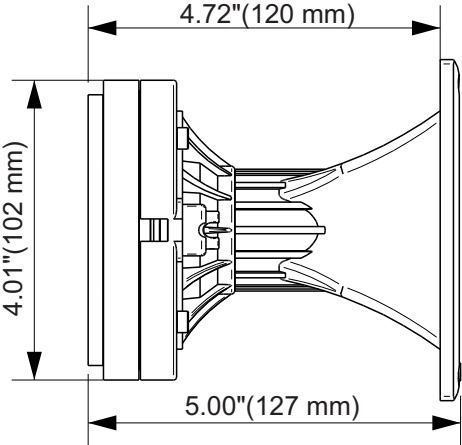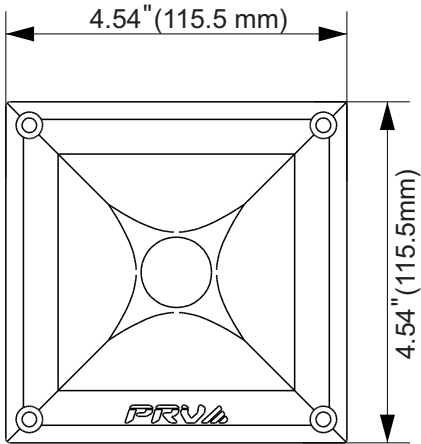


EXTRA INFO

Overall Depth	5.00" (127 mm)
Mounting Depth	4.72" (120 mm)
Overall Width	4.54" (115.5 mm)
Overall Height	4.54" (115.5 mm)
Baffle Cutout	4.01" (102 mm)
Net Weight	2.69 lb (1.22 kg)
Shipping Weight	3.02 lb (1.37 kg)
Carton Dimensions W x L x H	4.72" x 4.72" x 5.31"
	(120 x 120 x 135 mm)

Impedance Curve - Free Air

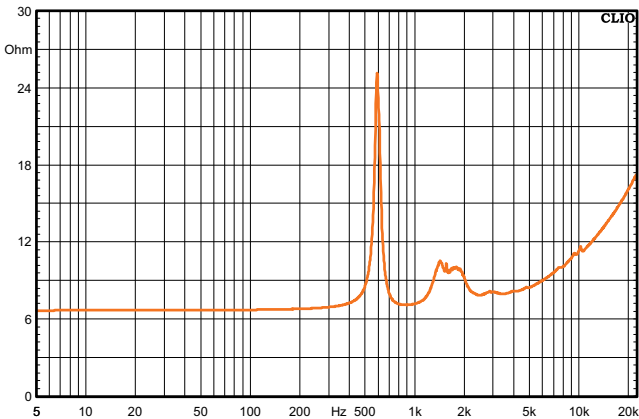

Frequency Response Measured at 2.83V/1m

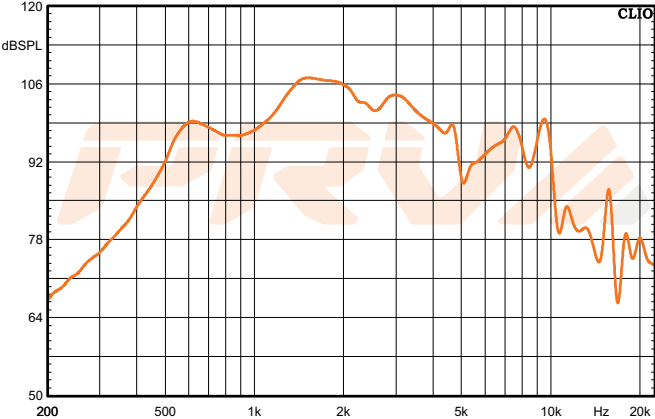

PRV AUDIO USA (USA and Export)
Fort Lauderdale, FL
support@prvaudio.com
www.prvaudio.com